


■ Power Protection for  
Business Critical Continuity

**Liebert GXT2**  
*10kVA for X-treme Density Applications*

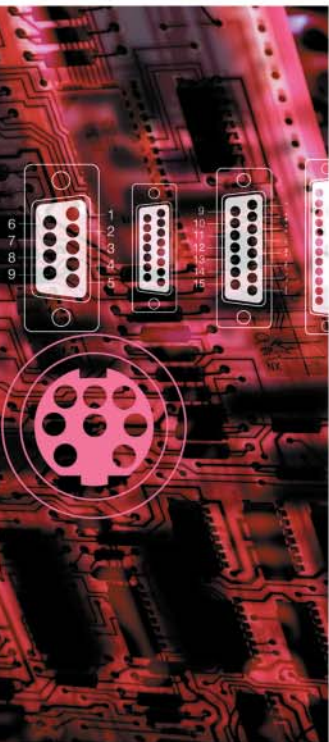

  
**EMERSON™**  
Network Power

# Uninterruptible Power in a Compact System for X-treme Density Environments.





The Liebert GXT2 10kVA Rack is part of the Emerson Network Power Adaptive Power and Cooling Architecture and is designed for Liebert X-treme Solutions.



■ With its compact 6U format and best-in-class set of features the new Liebert GXT2 10kVA from Emerson Network Power is the ideal solution for the power protection of Blade Servers, Pizza Box Servers, Voice over IP devices, and other Data Center or Network Closet equipment in standard 19" Rack cabinets.

■ Capable of redundant power configuration the Liebert GXT2 10kVA becomes a modular and scalable solution that adapts to your changing needs. You can use it in 1+1 or 2+1 configuration with up to 20kVA to supply clean power to your applications and 10kVA ready in case a critical condition occurs, or you can use it to its full power up to 30kVA with 3 modules in parallel.

■ A high-performance UPS with proven reliability, custom configurability, hot-swap internal batteries and extensive run-time options in a compact rack design, the Liebert GXT2 features and flexibility make it the optimal solution for your server & data room, networking and telecom applications that require reliable, continuous quality power.

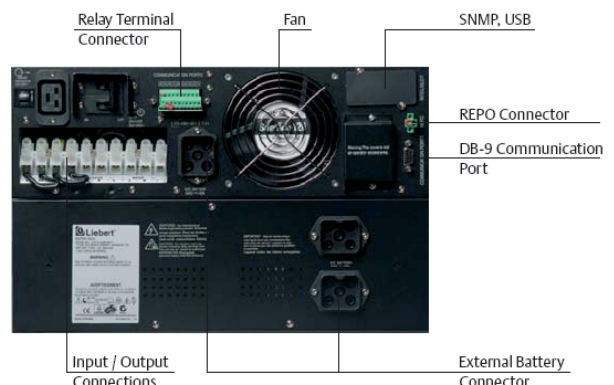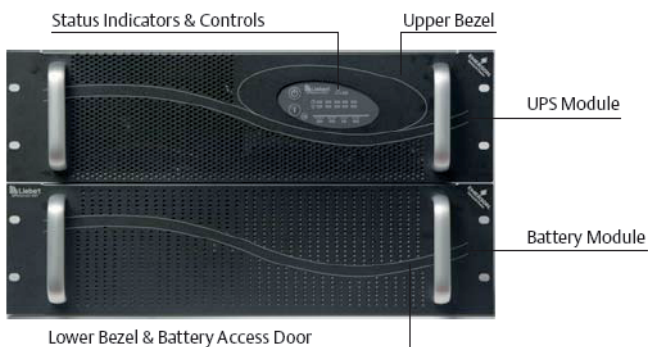



## Liebert GXT2 10kVA for X-treme Density Applications

### Key Benefits

- Online VFI Technology With Sinewave Output
- Parallel configuration to grow in redundancy or power
- Extended Battery Options for Long Runtimes
- USB, Serial and Network Communications
- Power Factor corrected input
- Advanced Early Warning Shutdown with MultiLink software
- User Configurable Settings, Voltage & Frequency
- Hot-Swappable, User Replaceable Batteries
- Cold-start on Battery
- Remote UPS Monitoring through SNMP/Web Card
- Compact Design in 3U + 3U size
- Available for configurations of 1, 2 or 3 units to supply the full power or in redundant mode 1+1, 2+1 or 1+2

### Applications

- Blade Servers
- Pizza box (1U) servers
- LAN and WAN Network servers
- Clustered network equipment: hubs, routers, bridges
- Voice over IP (VoIP) switches and routers
- Office Telecommunications systems
- Voicemail and e-mail servers
- Test and diagnostic equipment
- Micro processor-controlled equipment
- Other Mission Critical devices

## SPECIFICATION

### UPS UNIT

Model	GXT2-10000R230
Power VA / W	10000 / 7000
Dimensions (WxDxH mm)	410 x 630 x 130 (3U)
Weight - Unit (kg)	27kg (electronics does not include batteries)
Degree of protection	IP20
Color	IBM Black - Ral 9005
Input Voltage	230V L-N single phase L,N,G
Input/Output Frequency	50/60Hz autoselect input, configurable output
Input Voltage Tolerance	176-276V 84V / 120V / 160 V with output derating: 50% / 75% / 90%
Input Frequency Tolerance	±5% within nominal
Input Power Factor & THDi	0.97 - < 5%
Input & Output Connections	Hardwired
Output Waveform	Sinewave
Overload warning	125% 1 minute 150% 10 seconds 300% 2 seconds
Short circuit current for 5 cycles	160A peak (typical)
Efficiency	92%
Acoustic Noise	<55dBA
Operating temp and altitude	0 - 40°C (with batteries) -25 - +55°C (without batteries)
Relative Humidity	0-90% non condensing
Communications	DB9, Intellislot, Relay Comms

### Battery Cabinet

Models	GXT2-240RVBATT
Dimensions (WxDxH mm)	410 x 630 x 130 (3U)
Weight - Unit (kg)	67
Backup time minutes	
1 / 2 / 3 / 4 Cabinets Full load	6 / 16 / 26 / 36
1 / 2 / 3 / 4 Cabinets Half load	13 / 35 / 60 / 90
Batteries	Yuasa: NPW 45-12 or REW 45-12 (20 x 12V / 45W / 9Ah)
Battery Test	automatic (configurable to 7, 14, 21, 28 days)

### Warranty and Standards

Warranty	2 years
Standards & Requirements	CE Mark
Safety	IEC / EN 62040-1-1 CE Low Voltage directive 73/23/EEC
Electromagnetic compatibility	IEC / EN 62040-2 - Class A CE EMC directive 89/336/EEC
Design	IEC 62040-3 VFI-SS-111
Transport	ISTA Level 1A

Approximate discharge times are in minutes and at 25 ° C with resistive load. While every precaution has been taken to ensure accuracy and completeness in this brochure, Emerson Network Power assumes no responsibility, and claims all liability for damages resulting from use of this information or for any errors or omissions. ©2006 Emerson Network Power. All rights reserved throughout the world. Specifications subject to change without prior notice. All names referred to are trademarks or registered trademarks of their respective owners

**Emerson Network Power**  
1050 Dearborn Drive P.O. Box 29186 Columbus, Ohio 43229  
T: 614-8880246 F: 614-8416022  
T: 800-8779222 ( US and Canada Only)

**Country Offices**

Emerson Network Power (Australia) Pty Ltd  
Block P, Regents Park Estate, 391 Park Road, Regents Park,  
Sydney, NSW 2143, Australia  
T: 61-1300367686 F: 61-2-97438737

**Emerson Network Power (China) Ltd**  
No.1 Kefa Road, Science & Industry Park, Nanshan District,  
Shenzhen 518057, China  
T: 86-755-86010808 F: 86-755-86010909

**Emerson Network Power (Hong Kong) Ltd**  
7/F, Dah Sing Financial Centre, 108 Gloucester Road,  
Wanchai, Hong Kong  
T: 852-25722201 F: 852-28310114

**Emerson Network Power (India) Private Ltd**  
Plot No. C-20, Road No. 19, Wagle Industrial Estate,  
Thane (West), Maharashtra 400604, India  
T: 91-22-25807000 / 2388 F: 91-22-25828358

**Emerson Network Power (Indonesia), c/o PT Emerson Indonesia**  
c/o PT Emerson Indonesia Wisma Pondok Indah 1st Floor, Jl. Sultan  
Iskandar Muda V TA, Jakarta 12310, Indonesia  
T: 62-21-7507800 F: 62-21-7507899

**Emerson Network Power Division / Emerson Japan Ltd**  
New Pier Takeshiba, South Tower 7F, 1-16-1 Kaigan,  
Minato-ku, Tokyo 105-0022, Japan  
T: 81-3-54038594 F: 81-3-54032924

Countries covered by our Asia Network include:  
Bangladesh, Sri Lanka, Nepal, Pakistan, Vietnam, Laos,  
Seychelles, Cambodia, Brunei, Papua New Guinea, Fiji

**Emerson Network Power.**  
The global leader in enabling business-critical continuity.

- AC Power
- Embedded Power
- Outside Plant
- Connectivity
- Inbound Power
- Precision Cooling
- DC Power
- Integrated Cabinet Solutions
- Site Monitoring and Services

**Emerson Network Power Asia Pacific Headquarters**  
7/F, Dah Sing Financial Centre, 108 Gloucester Road,  
Wanchai, Hong Kong  
T: 852-25722201 F: 852-28310114

**Emerson Network Power (Korea)**  
8th Fl. Hongik University KangNam Art Center,  
51-12 Banpo-Dong, Seocho-Gu, Seoul 137-044, Korea  
T: 82-2-34831500 F: 82-2-5927883

**Emerson Network Power (Malaysia) Sdn Bhd**  
Wisma Glomac 3, Block C, 7th Floor, Jalan SS 7/19,  
Kelana Jaya, 47301 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
T: 7884 5000 F: 7884 5188

**Emerson Network Power (New Zealand) Co. Ltd.**  
Unit 2, 75 Blenheim Road, Christchurch New Zealand  
T: 64-3-3430235 F: 64-3-3430250

**Emerson Network Power (Philippines), Inc.**  
3/F, King's Court 1 Building, 2129 Chino Roces Avenue,  
Makati City 1200, Philippines  
T: 63-2-8934177 / 178 F: 63-2-8112027

**Emerson Network Power (Singapore) Pte Ltd**  
27 International Business Park # 03-01 Primefield-Landmark Building  
Singapore 609924  
T: 65-64672211 F: 65-64670130

**Emerson Network Power (Taiwan) Ltd**  
11F, 141 Jen Ai Road, Section 3, Taipei 106, Taiwan, R.O.C.  
T: 886-2-87713655 F: 886-2-87717297

**Emerson Network Power (Thailand) Co Ltd**  
123 Suntowers Bldg.-B, 22nd Fl, Vibhavadi-Rangsit Road,  
Ladyao, Chatuchak, Bangkok 10900, Thailand  
T: 66-2-6178260 F: 66-2-6178277 / 278

Mail [marketing@emersonnetwork-ap.com](mailto:marketing@emersonnetwork-ap.com)  
for contact details